



## 200w 2in1 LED Profile Light Instructions

### 1. The illustration part

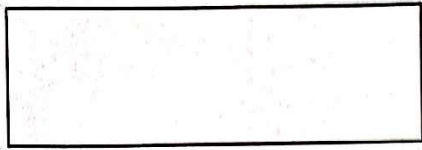

A B C D

- A. Function key
- B. Add +
- C. Minus -
- D. Confirm

### 2. The LED display window function

No.	Menu	Function	explain
1	DMX-ADDR 001	DMX512 address setting 001	Press up and down to setting address, then press "confirm" to save
2	R-DIMMER 255	Warm white LED brightness adjust 255	Press up and down to adjust brightness of LED, then Press "confirm" to save
3	G-DIMMER 255	Cold white LED brightness adjust 255	Press up and down to adjust brightness of LED, then Press "confirm" to save
4	P_STROBE 255	Flash speed adjust 255	Press up and down to adjust flash speed, then press "confirm" to save
5	DMX-KEEP ON/OFF	DMX keep choice	Press up and down to choose whether keep, and press "confirm" to save

### 3. DMX512

NO.	Function	Description
Channel 1	Total Dimmer	(0-255) LED dimmer, linear dimmer, from dark to bright
Channel 2	Flash speed	(0-255) adjust flash speed
Channel 3	Warm white dimmer	(0-255) LED dimmer, linear dimmer, from dark to bright
Channel 4	Cold white dimmer	(0-255) LED dimmer, linear dimmer, from dark to bright