



# 200W Led Blind light instructions

## 1.The illustration part:

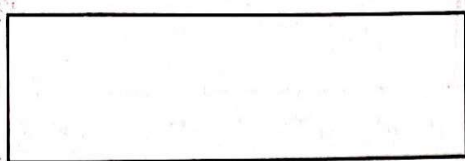

A B C D

A.Function key  
B.Additional key  
C.Reduction key  
D.OK key

Instructions: according to the function keys can cycle out several different functional effect, A digital tube in the first two digits represent the current function (see menu). After the two digits represent the function of. Address code. Or speed, parameters. Press B or C can modify the parameter values. Press the D key to confirm.

## 2. The LED display window function, (all function according to the selection and then press the D key to save)

display	function description
A001	Eight channel address code, (001—512) B, C key to add and subtract address code values
ADYE	back to dmx 512 address
FF00	auto mode with speed adjustment (00-99)
AU01	color selection
EE00	color fade with speed adjustment (00-99)
CC00	color pulse with speed adjustment (00-99)
F000	strobe from slow to fast (000-255)
SOUD	strobe by sound
SUND	color change by sound
R000	lift lamp dimmer(000-255)
G000	right lamp dimmer(000-255)

## 3. DMX512 channel show

No.	value	description
Channel 1	1-255	dimmer
Channel 2	1-255	lift lamp dimmer
Channel 3	1-255	right lamp dimmer
Channel 4	0-255	strobe
Channel 5	0-255	micro function
Channel 6	0-255	function of speed, from slow to fast

## 4. functional characteristics:

Operation is very simple, humanized design, dimming flicker-free, dithering phenomenon, etc. Can adapt to photography, photography, television, etc Strict in lighting occasions