


Specification HUB P3.91 outdoor 500X1000 Rental LED Panel Screen

LED Technical Parameters(Chip Lamp : KingLight)

No.	Item	Luminance (mcd)	Viewing Angle(H/V)	Wavelength	Original Place
1	Red LED	600-800	-160°/160°	620-625NM	King Light 
2	Green LED	1000-1800	-160°/160°	520-525NM	
3	Blue LED	300-400	-160°/160°	465-470NM	

SMD Module Specifications&Pixel Technical Parameters

1	Pixel Pitch	3.91MM	Pixel Configuration	1R1G1B
2	Encapsulation	SMD1921	Colors Matches	R:G:B= 1:1:1
3	Module Resolution(H*W)	64 Dots X 64 Dots	Module Pixel	4096 Dots
4	Module Size (H*W)	250MM x 250MM	Driver IC	3264
5	The Smd module is not a monitor is not a display, is not a screen because is just a part of led screen it a part for replacements			

6	Module	   		
---	--------	--	--	--

7	Manufacturer Declaration : The Smd module is not a monitor is not a display, is not a screen because is just a part of led screen it a part for replacements , This is Repair Parts , Convenient for customers to use their own maintenance , Quick replacement, quick repair.			
---	--	--	--	--

Power Supplier (80A 400W Bi-Voltage Power Supplier) Specifications Technical Parameters

1	Input voltage range	220V	Output rated power	400W
2	Input Frequency Range	47Hz ~ 63Hz	Output Ripple and noise	100mV
3	Input effectiveness	86%	Output Voltage adjustment range	4.5V ~ 5.6V
4	Input Alternating current	3A	Output Voltage tolerance	± 1%
5	Input Inrush current	80A	Output Linear adjustment rate	± 0.5%
6	Input Leakage current	2.0mA	Output Load Regulation	± 2.0%
7	Output DC voltage	5V	Output Start Time	50mS
8	Output Rated current	80A	Output Keep time	20mS
9	Output Current range	0 ~80A	Storage temperature, humidity	-40℃ ~+80℃,10%~95%RH
10	Dimensions	212*85*30mm G.W 0.6KG	Working temperature, humidity	-30℃ ~+60℃,20% to 90% RH, non condensing

Network Signal Line Cable Specifications Technical Parameters

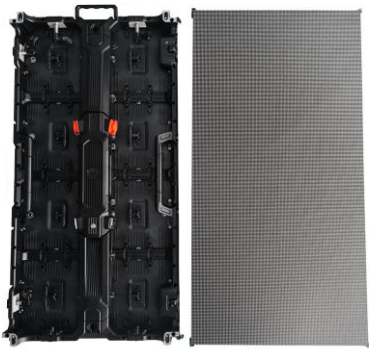
1	Model RJ45 - Nominal voltage Un 5v2 - Maximum continuous operating voltage Uc 8V - Limit voltage 15V - Rated load current IL 500mA - Nominal discharge current In (8 / 20us) 5KA - Maximum discharge current Imax (8 / 20us) 10KA - Response time ≤ 1ns - Maximum transfer rate of 150Mbps - Insertion loss <0.5dB - Protection lines 1, 2, 3, 6 - Case protection class IP20 - FAILURE MECHANISMS Communication lines are shorted or disconnected from ground - Product range Terminal PC network card Surge protection Other network equipment interface Surge protection	
---	---	--

Power Cable Specifications Technical Parameters

1	Interface type: AC / DC Production process: welding Features: Waterproof Operating frequency: high frequency (MHz) Line length: customized according to customer needs (mm) Insulating material: nylon Number of cores: three cores Number of needles: three needles Category: Plug / socket Rated current: 23A Voltage: 500V (V) color: blue Applications: LED Shape: round Contact material: zinc alloy	  
---	--	---

Screen Specifications Technical Parameters

1	LED panel screen	P3.91 outdoor led panel
2	Cabinet Quantity (H*W)	95MM

3	Cabinet Size(HXW)	500MM x 1000MM
4	Display Physical Pixels (H*W)	128*256 Dots
5	Cabinet Parameters Voltage: AC 240V 50/60HZ Power: 400W Baina Control : (Nova A5S) Control System LED Module: 250X250mm (64*64Pixels) Physical Pixels : 65536Pixels/m2 LED brand : King light Light type: SMD1921 Driver IC : 3264 Brightness: 4500-5000cd/m ² MTBF: 100000hours Refresh frequency: ≥ 3840 Hz Cabinet Size(W*H): 500*1000mm (128*256Pixels) Weight: 13.5 KG Size: 500*1000*95mm Packge : 1090*700*740mm Flycase 6In1	
6	Cabinet Resolution (H*W)	128 Dots X 256 Dots
7	Material Of Cabinet	Die-Cast Aluminum
8	Cabinet Weight	13.5kg
9	Pixel Density	65536 dots/m2
10	Brightness	$\geq 4500-5000$ cd/m ²
11	Driving Method	Scan 1/16
12	Driver IC	ICN 3264
13	ReFresh Frequency	≥ 3840 Hz
14	Frame Frequency	≥ 60 Hz
15	Gray Scale Rectification	16384 grades
16	Color temperature	5600K $\pm$ 500
17	Working Voltage	AC220V $\pm$ 15% 40~65HZ
18	Waterproof	IP65
19	View Angle	Horizontal 160° Vertical 140°
20	Maintenance	Back servie
21	Best View Distance	3m~120m
22	Brightness Adjustment	Manual & Automatically
23	Colors	16.7millio
24	Non-malfunction time (Avg.)	>5000hours
25	Screen life	>100,000 hours
26	Blind Rate	≤ 0.0003
27	Average Power Consumption	450W/m ²
28	Max. Power Consumption	900W/m ²
29	Control Distance	<100meter by Internet Cable (without Relay) ; Fiber Cable > 500 meters.
30	Temperature Color	-20°C~60°C , storage for :-30°C~+90°C
31	System Working Environment Humidity	10%—90%RH
32	Continuous Working Time	72hours
33	Input voltage	AC220V/50Hz $\pm$ 10%
34	Type of video signal	Many kinds of signal access: can input TV signals ,DVD signals , DVI, S-VIDEO, RGB, VGA, RF、RGBHV、YUV、YC、COMPOSITION , And so on.

