



## R458

Broca Force-X Serie Curta 3XD

**NEW**  
2017.04

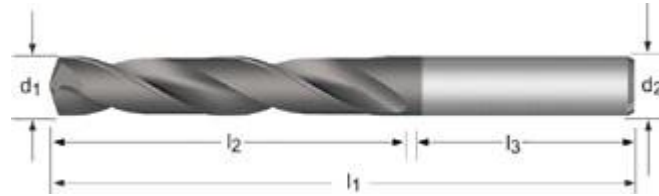

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Ø <sub>m7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Ø <sub>h6</sub> mm	e-code	BRL
	3.00	0.1181	20	62	36	6	R4583.0	
	3.10	0.1220	20	62	36	6	R4583.1	
1/8	3.18	0.1252	20	62	36	6	R4581/8	
	3.20	0.1260	20	62	36	6	R4583.2	
30	3.26	0.1283	20	62	36	6	R458N30	
	3.30	0.1299	20	62	36	6	R4583.3	
	3.40	0.1339	20	62	36	6	R4583.4	
29	3.45	0.1358	20	62	36	6	R458N29	
	3.50	0.1378	20	62	36	6	R4583.5	
28	3.57	0.1406	20	62	36	6	R458N28	
9/64	3.57	0.1406	20	62	36	6	R4589/64	
	3.60	0.1417	20	62	36	6	R4583.6	
27	3.66	0.1441	20	62	36	6	R458N27	
	3.70	0.1457	20	62	36	6	R4583.7	
	3.73	0.1469	24	66	36	6	R4583.73	
26	3.73	0.1469	24	66	36	6	R458N26	
25	3.80	0.1496	24	66	36	6	R458N25	
	3.80	0.1496	24	66	36	6	R4583.8	
24	3.86	0.1520	24	66	36	6	R458N24	
	3.90	0.1535	24	66	36	6	R4583.9	
23	3.91	0.1539	24	66	36	6	R458N23	
5/32	3.97	0.1563	24	66	36	6	R4585/32	
22	3.99	0.1571	24	66	36	6	R458N22	
	4.00	0.1575	24	66	36	6	R4584.0	
21	4.04	0.1591	24	66	36	6	R458N21	

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Øm <sub>7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Øh <sub>6</sub> mm	e-code	BRL
20	4.09	0.1610	24	66	36	6	R458N20	
	4.10	0.1614	24	66	36	6	R4584.1	
	4.20	0.1654	24	66	36	6	R4584.2	
19	4.22	0.1661	24	66	36	6	R458N19	
	4.30	0.1693	24	66	36	6	R4584.3	
18	4.31	0.1697	24	66	36	6	R458N18	
11/64	4.37	0.1720	24	66	36	6	R45811/64	
17	4.39	0.1728	24	66	36	6	R458N17	
	4.40	0.1732	24	66	36	6	R4584.4	
	4.50	0.1772	24	66	36	6	R4584.5	
16	4.50	0.1772	24	66	36	6	R458N16	
15	4.57	0.1799	24	66	36	6	R458N15	
	4.60	0.1811	24	66	36	6	R4584.6	
14	4.62	0.1819	24	66	36	6	R458N14	
13	4.70	0.1850	24	66	36	6	R458N13	
	4.70	0.1850	24	66	36	6	R4584.7	
3/16	4.76	0.1874	28	66	36	6	R4583/16	
	4.80	0.1890	28	66	36	6	R4584.8	
12	4.80	0.1890	28	66	36	6	R458N12	
11	4.85	0.1909	28	66	36	6	R458N11	
	4.90	0.1929	28	66	36	6	R4584.9	
10	4.92	0.1937	28	66	36	6	R458N10	
9	4.98	0.1961	28	66	36	6	R458N9	
	5.00	0.1969	28	66	36	6	R4585.0	
8	5.06	0.1992	28	66	36	6	R458N8	
	5.10	0.2008	28	66	36	6	R4585.1	
7	5.11	0.2012	28	66	36	6	R458N7	
13/64	5.16	0.2031	28	66	36	6	R45813/64	
6	5.18	0.2039	28	66	36	6	R458N6	
	5.20	0.2047	28	66	36	6	R4585.2	
5	5.22	0.2055	28	66	36	6	R458N5	
	5.30	0.2087	28	66	36	6	R4585.3	
4	5.31	0.2091	28	66	36	6	R458N4	
	5.40	0.2126	28	66	36	6	R4585.4	
3	5.41	0.2130	28	66	36	6	R458N3	
	5.50	0.2165	28	66	36	6	R4585.5	
7/32	5.56	0.2189	28	66	36	6	R4587/32	
	5.60	0.2205	28	66	36	6	R4585.6	
2	5.61	0.2209	28	66	36	6	R458N2	
	5.70	0.2244	28	66	36	6	R4585.7	
1	5.79	0.2280	28	66	36	6	R458N1	
	5.80	0.2283	28	66	36	6	R4585.8	
	5.90	0.2323	28	66	36	6	R4585.9	
A	5.94	0.2339	28	66	36	6	R458A	
15/64	5.95	0.2343	28	66	36	6	R45815/64	

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Øm <sub>7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Øh <sub>6</sub> mm	e-code	BRL
	6.00	0.2362	28	66	36	6	R4586.0	
B	6.03	0.2374	34	79	36	8	R458B	
	6.10	0.2402	34	79	36	8	R4586.1	
C	6.15	0.2421	34	79	36	8	R458C	
	6.20	0.2441	34	79	36	8	R4586.2	
D	6.25	0.2461	34	79	36	8	R458D	
	6.30	0.2480	34	79	36	8	R4586.3	
1/4	6.35	0.2500	34	79	36	8	R4581/4	
E	6.35	0.2500	34	79	36	8	R458E	
	6.40	0.2520	34	79	36	8	R4586.4	
	6.50	0.2559	34	79	36	8	R4586.5	
F	6.53	0.2571	34	79	36	8	R458F	
	6.60	0.2598	34	79	36	8	R4586.6	
G	6.63	0.2610	34	79	36	8	R458G	
	6.70	0.2638	34	79	36	8	R4586.7	
17/64	6.75	0.2657	34	79	36	8	R45817/64	
H	6.76	0.2661	34	79	36	8	R458H	
	6.80	0.2677	34	79	36	8	R4586.8	
	6.90	0.2717	34	79	36	8	R4586.9	
I	6.91	0.2720	34	79	36	8	R458I	
	7.00	0.2756	34	79	36	8	R4587.0	
J	7.04	0.2772	34	79	36	8	R458J	
	7.10	0.2795	41	79	36	8	R4587.1	
K	7.14	0.2811	41	79	36	8	R458K	
9/32	7.14	0.2811	41	79	36	8	R4589/32	
	7.20	0.2835	41	79	36	8	R4587.2	
	7.30	0.2874	41	79	36	8	R4587.3	
L	7.37	0.2902	41	79	36	8	R458L	
	7.40	0.2913	41	79	36	8	R4587.4	
M	7.49	0.2949	41	79	36	8	R458M	
	7.50	0.2953	41	79	36	8	R4587.5	
19/64	7.54	0.2969	41	79	36	8	R45819/64	
	7.60	0.2992	41	79	36	8	R4587.6	
N	7.67	0.3020	41	79	36	8	R458N	
	7.70	0.3031	41	79	36	8	R4587.7	
	7.80	0.3071	41	79	36	8	R4587.8	
	7.90	0.3110	41	79	36	8	R4587.9	
5/16	7.94	0.3126	41	79	36	8	R4585/16	
	8.00	0.3150	41	79	36	8	R4588.0	
O	8.03	0.3161	47	89	40	10	R458O	
	8.10	0.3189	47	89	40	10	R4588.1	
	8.20	0.3228	47	89	40	10	R4588.2	
P	8.20	0.3228	47	89	40	10	R458P	
	8.30	0.3268	47	89	40	10	R4588.3	
21/64	8.33	0.3280	47	89	40	10	R45821/64	

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Ø <sub>m7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Ø <sub>h6</sub> mm	e-code	BRL
	8.40	0.3307	47	89	40	10	R4588.4	
Q	8.43	0.3319	47	89	40	10	R458Q	
	8.50	0.3346	47	89	40	10	R4588.5	
	8.60	0.3386	47	89	40	10	R4588.6	
R	8.61	0.3390	47	89	40	10	R458R	
	8.70	0.3425	47	89	40	10	R4588.7	
11/32	8.73	0.3437	47	89	40	10	R45811/32	
	8.80	0.3465	47	89	40	10	R4588.8	
S	8.84	0.3480	47	89	40	10	R458S	
	8.90	0.3504	47	89	40	10	R4588.9	
	9.00	0.3543	47	89	40	10	R4589.0	
T	9.09	0.3579	47	89	40	10	R458T	
	9.10	0.3583	47	89	40	10	R4589.1	
23/64	9.13	0.3594	47	89	40	10	R45823/64	
	9.20	0.3622	47	89	40	10	R4589.2	
	9.30	0.3661	47	89	40	10	R4589.3	
U	9.35	0.3681	47	89	40	10	R458U	
	9.40	0.3701	47	89	40	10	R4589.4	
	9.50	0.3740	47	89	40	10	R4589.5	
3/8	9.52	0.3748	47	89	40	10	R4583/8	
V	9.58	0.3772	47	89	40	10	R458V	
	9.60	0.3780	47	89	40	10	R4589.6	
	9.70	0.3819	47	89	40	10	R4589.7	
	9.80	0.3858	47	89	40	10	R4589.8	
W	9.80	0.3858	47	89	40	10	R458W	
	9.90	0.3898	47	89	40	10	R4589.9	
25/64	9.92	0.3906	47	89	40	10	R45825/64	
	10.00	0.3937	47	89	40	10	R45810.0	
X	10.08	0.3969	55	102	45	12	R458X	
	10.10	0.3976	55	102	45	12	R45810.1	
	10.20	0.4016	55	102	45	12	R45810.2	
Y	10.26	0.4039	55	102	45	12	R458Y	
	10.30	0.4055	55	102	45	12	R45810.3	
13/32	10.32	0.4063	55	102	45	12	R45813/32	
	10.40	0.4094	55	102	45	12	R45810.4	
Z	10.49	0.4130	55	102	45	12	R458Z	
	10.50	0.4134	55	102	45	12	R45810.5	
	10.60	0.4173	55	102	45	12	R45810.6	
	10.70	0.4213	55	102	45	12	R45810.7	
27/64	10.72	0.4220	55	102	45	12	R45827/64	
	10.80	0.4252	55	102	45	12	R45810.8	
	10.90	0.4291	55	102	45	12	R45810.9	
	11.00	0.4331	55	102	45	12	R45811.0	
	11.10	0.4370	55	102	45	12	R45811.1	
7/16	11.11	0.4374	55	102	45	12	R4587/16	

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Ø <sub>m7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Ø <sub>h6</sub> mm	e-code	BRL
	11.20	0.4409	55	102	45	12	R45811.2	
	11.30	0.4449	55	102	45	12	R45811.3	
	11.40	0.4488	55	102	45	12	R45811.4	
	11.50	0.4528	55	102	45	12	R45811.5	
29/64	11.51	0.4531	55	102	45	12	R45829/64	
	11.60	0.4567	55	102	45	12	R45811.6	
	11.70	0.4606	55	102	45	12	R45811.7	
	11.80	0.4646	55	102	45	12	R45811.8	
	11.90	0.4685	55	102	45	12	R45811.9	
15/32	11.91	0.4689	55	102	45	12	R45815/32	
	12.00	0.4724	55	102	45	12	R45812.0	
	12.10	0.4764	60	107	45	14	R45812.1	
	12.20	0.4803	60	107	45	14	R45812.2	
31/64	12.30	0.4843	60	107	45	14	R45831/64	
	12.50	0.4921	60	107	45	14	R45812.5	
	12.70	0.5000	60	107	45	14	R45812.7	
1/2	12.70	0.5000	60	107	45	14	R4581/2	
	12.80	0.5039	60	107	45	14	R45812.8	
	13.00	0.5118	60	107	45	14	R45813.0	
33/64	13.10	0.5157	60	107	45	14	R45833/64	
	13.30	0.5236	60	107	45	14	R45813.3	
17/32	13.49	0.5311	60	107	45	14	R45817/32	
	13.50	0.5315	60	107	45	14	R45813.5	
	13.80	0.5433	60	107	45	14	R45813.8	
35/64	13.89	0.5469	60	107	45	14	R45835/64	
	14.00	0.5512	60	107	45	14	R45814.0	
	14.25	0.5610	65	115	48	16	R45814.25	
9/16	14.29	0.5626	65	115	48	16	R4589/16	
	14.50	0.5709	65	115	48	16	R45814.5	
37/64	14.68	0.5780	65	115	48	16	R45837/64	
	14.80	0.5827	65	115	48	16	R45814.8	
	15.00	0.5906	65	115	48	16	R45815.0	
19/32	15.08	0.5937	65	115	48	16	R45819/32	
	15.10	0.5945	65	115	48	16	R45815.1	
	15.30	0.6024	65	115	48	16	R45815.3	
39/64	15.48	0.6094	65	115	48	16	R45839/64	
	15.50	0.6102	65	115	48	16	R45815.5	
	15.80	0.6220	65	115	48	16	R45815.8	
5/8	15.88	0.6252	65	115	48	16	R4585/8	
	16.00	0.6299	65	115	48	16	R45816.0	
41/64	16.27	0.6406	73	123	48	18	R45841/64	
	16.50	0.6496	73	123	48	18	R45816.5	
21/32	16.67	0.6563	73	123	48	18	R45821/32	
	17.00	0.6693	73	123	48	18	R45817.0	
43/64	17.07	0.6720	73	123	48	18	R45843/64	

d <sub>1</sub> Ø "/Nr.	d <sub>1</sub> Øm <sub>7</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>3</sub> mm	d <sub>2</sub> Øh <sub>6</sub> mm	e-code	BRL
11/16	17.46	0.6874	73	123	48	18	R45811/16	
	17.50	0.6890	73	123	48	18	R45817.5	
	17.80	0.7008	73	123	48	18	R45817.8	
45/64	17.86	0.7031	73	123	48	18	R45845/64	
	18.00	0.7087	73	123	48	18	R45818.0	
23/32	18.26	0.7189	79	131	50	20	R45823/32	
	18.50	0.7283	79	131	50	20	R45818.5	
47/64	18.65	0.7343	79	131	50	20	R45847/64	
	19.00	0.7480	79	131	50	20	R45819.0	
	19.05	0.7500	79	131	50	20	R4583/4	
	19.50	0.7677	79	131	50	20	R45819.5	
	19.80	0.7795	79	131	50	20	R45819.8	
	20.00	0.7874	79	131	50	20	R45820.0	