


SPECIFICATIONS



Standard	NEMA 23
Step angle	$1.8^{\circ} \pm 5\%$
Current / Phase	2.0A
Voltage / Phase	3.6V
Phase No.	4
Resistance	$1.8 \pm 10\% \Omega$
Insulation resistance	100MOhm (500V DC)
Inductance	$2.8 \pm 20\% \text{mH}$
Insulation class	B
Holding torque	9.0kgf.cm

DIAGRAM

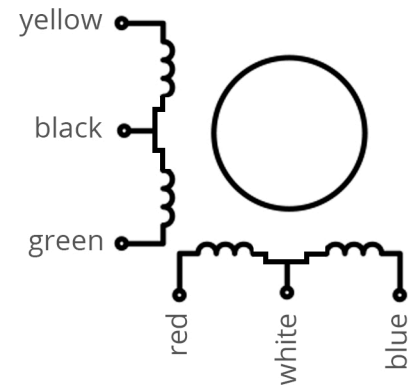

DIMENSIONS

UNIT: mm

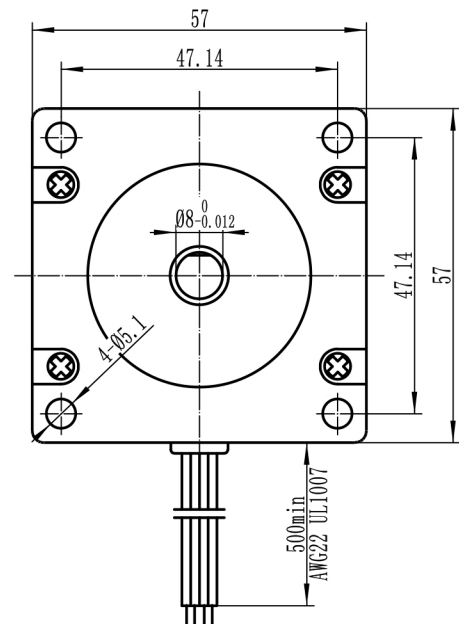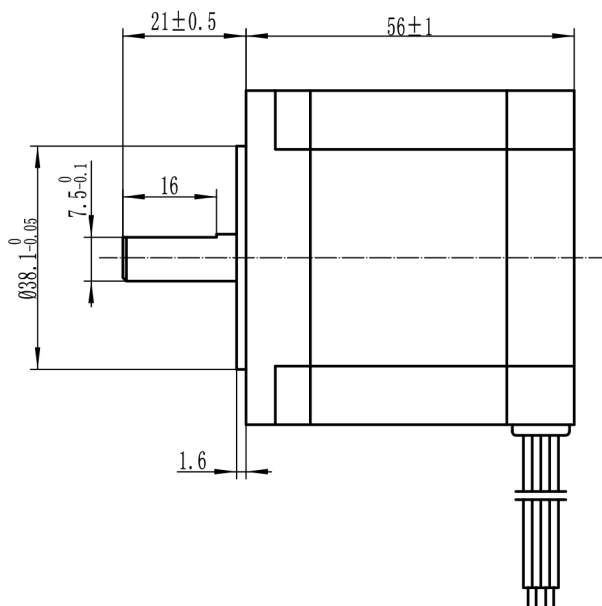



- NEMA 23 9 kgf.cm 2,0A
- WS23-0090-20-6

