

LED PAR LIGHT



Pro-55X5W RGBWA

III. Technical reference

- Power: AC 90-240V 50/60HZ
- Power consumption: 180W
- Lamp: 5W * 55PCS (Red: 7, Green: 12, Blue: 12, White:12, Amber:12)
- Channel: 8CH
- Control Signal: DMX, Auto mode, Sound mode, Master Slave mode
- Carton Size: 26×26×37 cm
- N.W.: 4.5.0kg
- G.W.: 4.8kg


IV. Master mode


2 sets or above light be connected by signal line, set any host computer for demo programs or gradient, jumping, the other light is set to receive address d001.



I . Operation by Digital Panel

- Push the "MENU" to set the mode
- Push the "UP" / "DOWN" to set the numerical value
- Push the "ENTER" to set the confirm

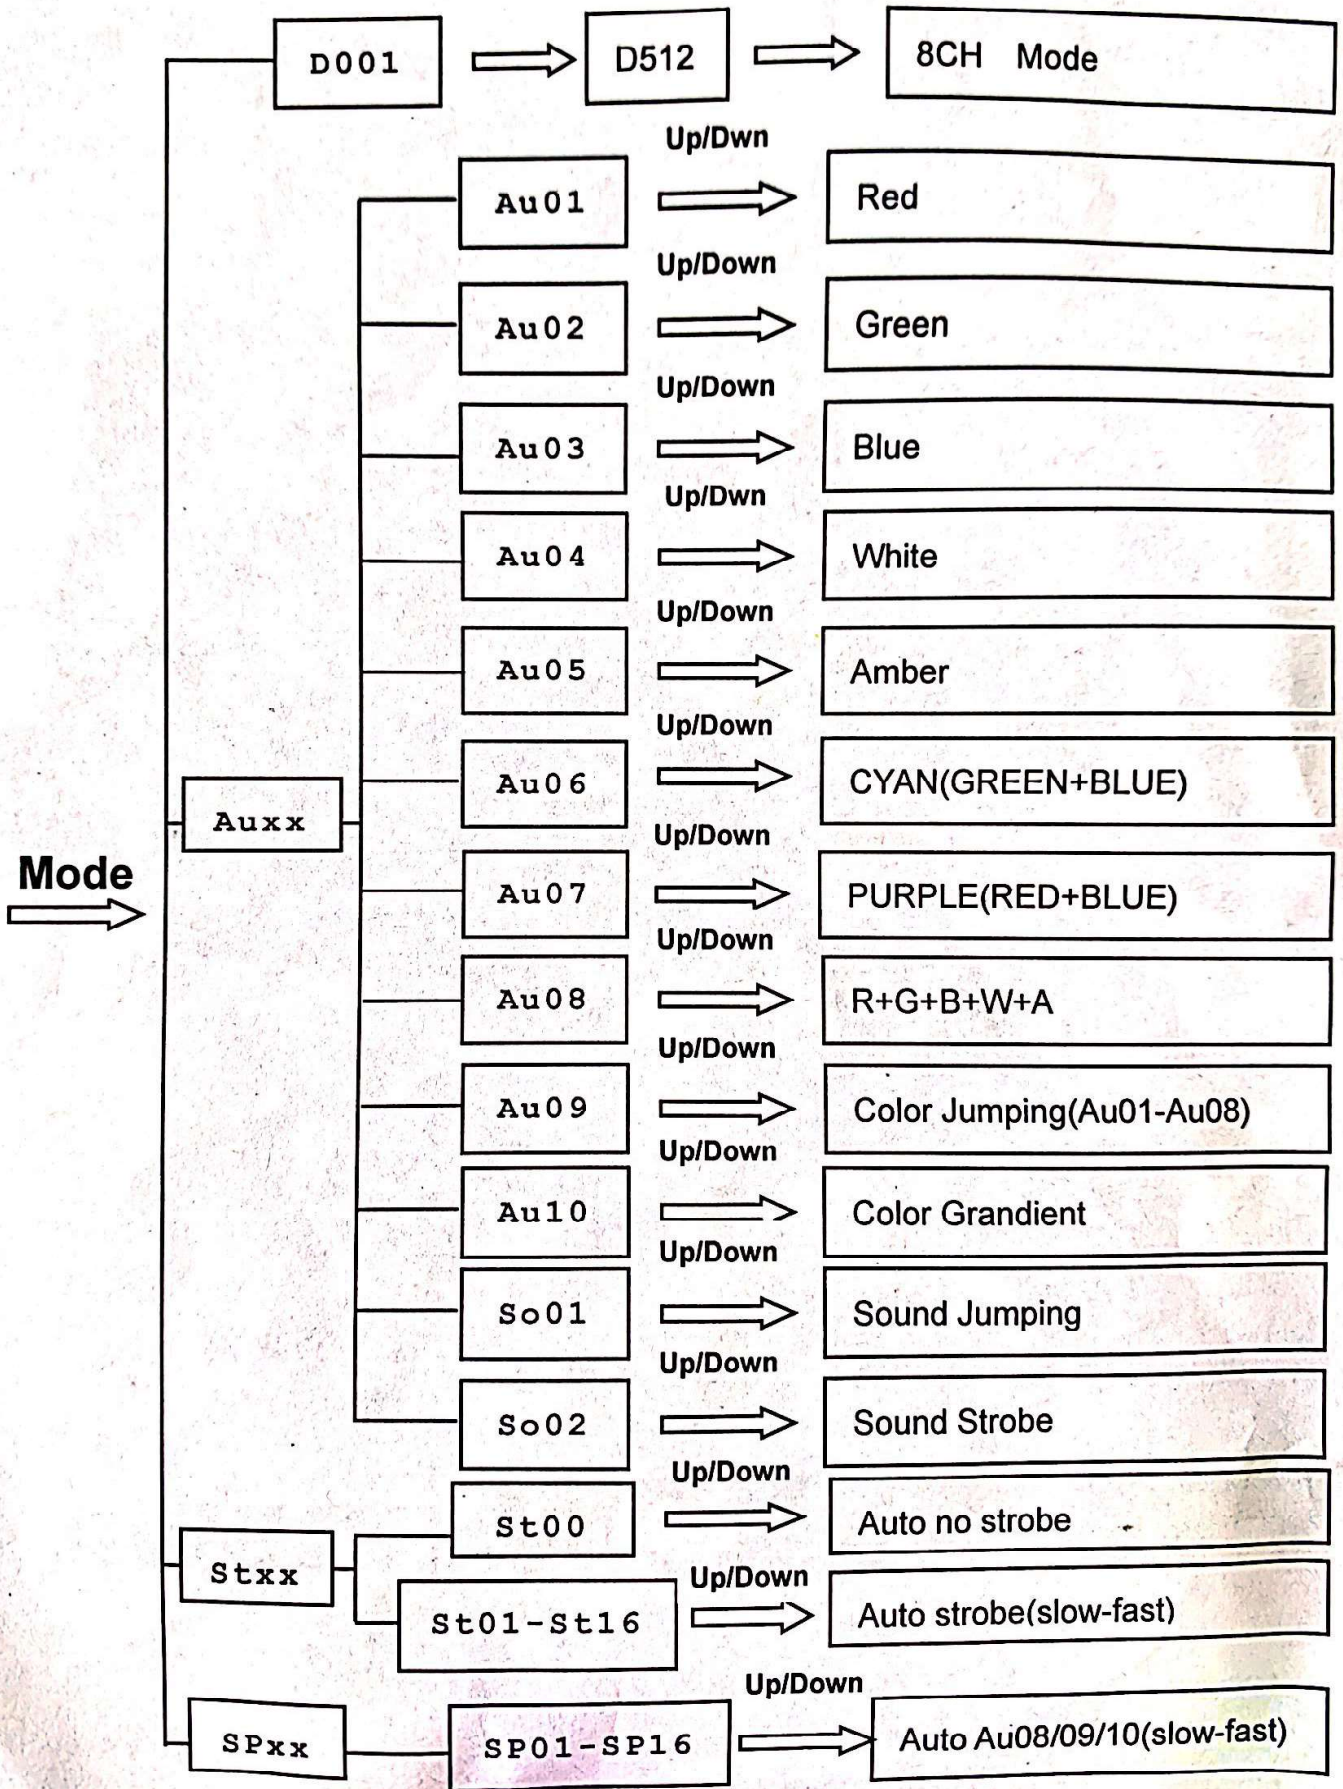

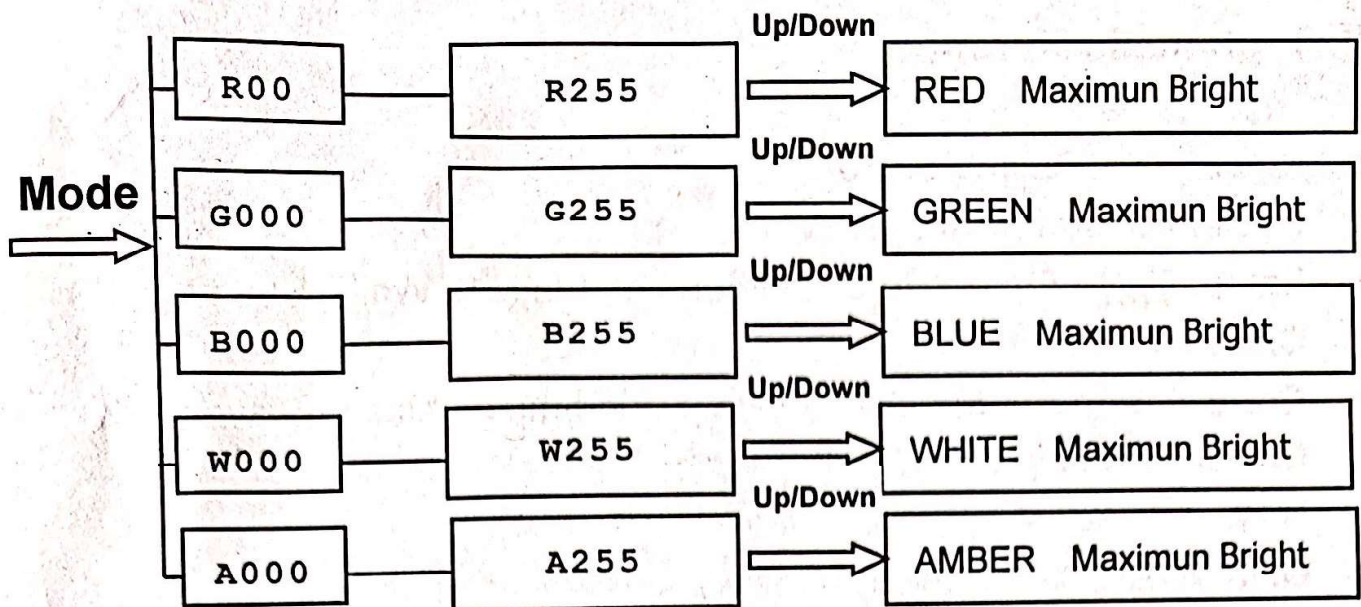

II. Channel

000 8 Channel

Channel	Numerical	Functional description
CH1	0-255	Dimmer
CH2	0-255	RED
CH3	0-255	GREEN
CH4	0-255	BLUE
CH5	0-255	WHITE
CH6	0-255	AMBER
CH7	0-255	Strobe
CH8	0-14	RED
	14-28	GREEN
	28-42	BLUE
	42-56	WHITE
	56-70	AMBER
	70-100	RED+BLUE+GREEN+WHITE+AMBER
	100-150	Grandient(RGBWA)
	151-200	Jumping(RGBWA)
	201-250	AUTO(RGBWA)
	251-255	SOUND MODE