

**Technical Reference:**

Voltage: AC110-220V 50-60HZ

Power: 450W

Light source: 44 PCS\*10W RGBW 4IN1 LED


DMX Channels: 8 /4 channel combination optional

Inner size: 480\*380\*130 MM

GW: 14.5 KG/PCS

**44 LED Wash Light-Water-Proof**

■ **RGBW 4IN1**

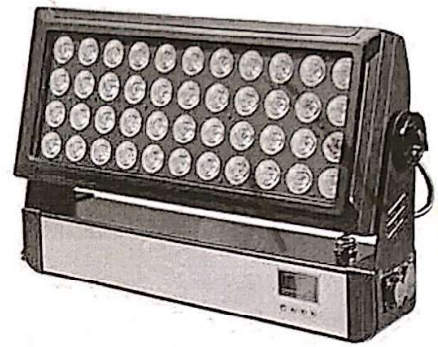

CE

Please Read Over This Manual before Operating the Light Fixture

Thank you so much to choose this product; it is adopting the most advanced lamps, which is called LED lamps. It conquers a lot of disadvantages such as power wasting, short using life, high temperature, etc. It has advantages of power saving, long life (it can reach 60,000.00 hours in general circs), high brightness, fresh colors...It is the best stage illuminating and various effect decorative products.


**DMX512Control : 8 Channel Model**

Channel	Function	Instruction
CH1	Dimmer	R、G、B、W dimmer : from dark to bright
CH2	Strobe	R、G、B、W strobe: from slow to fast
CH3	Function choice	0~50:none 51~100: Colors Jump Change. 101~150: Colors Gradate. 151~255: Colors Pulse Change.
CH4	Function speed	Speed function, from slow to fast
CH5	R dimmer	R dimmer : from dark to bright
CH6	G dimmer	G dimmer : from dark to bright
CH7	B dimmer	B dimmer : from dark to bright
CH8	W dimmer	W dimmer: from dark to bright

**DMX512**

Channel	Function	Instruction
CH1	R Dimmer	R dimmer : from dark to bright
CH2	G Dimmer	G dimmer : from dark to bright
CH3	B Dimmer	B dimmer : from dark to bright
CH4	W Dimmer	W dimmer: from dark to bright

**DMX512Control : 4 Channel Mode**



- A MENU
- B +
- C -
- D OK



A B C D

**LCD display window function**

NO	DISPLAY	Instruction
1	DMX-8CH D: 001	address, (001—512) B、C key change address code values
2	DMX-CH D: 4CH	CH select, (8CH/4CH) B、C key change CH mode
3	Jump D: 099	Colors Jump Change. (0-99) B、C key change speed
4	Gradient D: 099	Colors Gradate (0-99) B、C key change speed
5	Color R D: 255	Red color, (000—255) B、C key select color
6	Color G D: 255	Green color, (000—255) B、C key select color
7	Color B D: 255	Blue color, (000—255) B、C key select color
8	Color W D: 255	White color, (000—255) B、C key select color