


LED mini Moving Head (with LED strip)

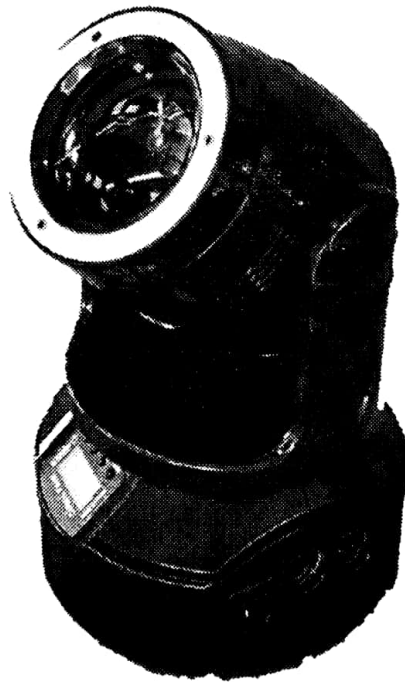

Please read the instruction manual carefully before use.

Menu Function

	d001-d512	DMX address setting
SLnd	Auto	Master: fast Auto mode
	Soun	Master sound control
	SL 1	Slave mode
	SLou	Master: slow Auto mode
SEnS	0-99	Sound sensitivity adjustment
rPAN	no	X motor forward
	YES	X motor reverse
rTiL	no	Y motor forward
	YES	Y motor reverse
dISP	no	Display reverse
	YES	Display forward
CHnd	13CH	13CH Mode
rESt	YES	System reset

13CH Table

Channel	Function	Description
1	Pan/X	0-255
2	Pan fine	0-255
3	Tilt/Y	0-255
4	Tilt fine	0-255
5	Speed of Pan/Tilt	0-255
6	Dimming	0-255
7	Strobe	0-255
8	Color	
	0-127	color selection
	128-255	Color changing from slow to fast
9	Pattern	
	0-128	Fixed pattern
	128-255	Pattern changing from slow to fast
10	Prism	0-99: OFF 100-127: ON 128-255: Prism rotation from fast to slow
11	AUTO	
	0-9	Other channel effects
	10-104	Fast AUTO mode
	105-194	Slow AUTO mode
	105-194	Sound control mode
12	Reset	250-255 (5S)
13	LEd strip	Strip effect

Technical parameter:

Voltage: AC110-220V, 50-60Hz

Power: 120W

Light source: 1pc 100W White LED+ 12pcs 0.2W RGB LED

Pattern: 8 patterns

Color: 8 colors

Channel: 13CH

Control mode: sound control, master-slave, Auto, DMX

Pan: 540°

Tilt: 180°

Manual zoom