

LED Stage Lighting Operating Manual




ONE PRO – B200



Please read manual carefully before use.

Thank you so much to choose this product; it is adopting the most advanced lamps, which is called LED lamps. It conquers a lot of disadvantages such as power wasting, short using life, high temperature, etc. It has advantages of power saving, long life (LED lamp it can reach 60,000.00 hours in general circs), high brightness, fresh colors...It is the best stage illuminating and various effect decorative products.

Display interface

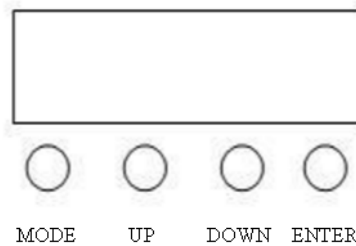

DIGITAL SHOW FUNCTION FORM

NO	Display	Instruction
1	CH1/5/9	Channel mode select
2	d001	Address set
3	E255	LED1 White dimming
4	F255	LED1 Warm white dimming
5	H255	LED2 White dimming
6	L255	LED2 Warm white dimming
7	Pr01	Built in program select
8	SP01	Built in program running speed
9	AUTO	Auto mode
10	AUDI	Sound control model
11	DISP	Off screen setting
12	DISP	Display Inverted

Channel mode

1CH

CH	Function	Explain
CH1	Dimmer	Total dimming

5CH

CH	Function	Explain
CH1	Dimmer	Total dimming
CH2	W dimming	LED1 White dimming
CH3	WW dimming	LED1 Warm White dimming
CH4	W dimming	LED2 White dimming
CH5	WW dimming	LED2 Warm White dimming

9CH

CH	Function	Explain
CH1	Dimmer	Total dimming
CH2	LED1 W dimming	LED1 White dimming
CH3	LED1 WW dimming	LED1 Warm White dimming
CH4	LED2 W dimming	LED2 White dimming
CH5	LED2 WW dimming	LED2 Warm White dimming
CH6	Strobe	Strobe from slow to fast
CH7	Select Combination	Select LED1 W WW LED2 W WW Combination
CH7	Built in program2	0-21 none, 22-255 built in program
CH8	speed	Built in program running speed

Technical:

Voltage: AC110-220V 50-60HZ

Power: 350W

Light source: 2PCS*100W white and warm white 2in1

DMX Channels: 1/5/9 channel mode

IP:IP65

