8-input multiplexer Rev. 4 — 11 February 2013

#### 1. **General description**

The 74HC151; 74HCT151 are 8-bit multiplexer with eight binary inputs (I0 to I7), three select inputs (S0 to S2) and an enable input (E). One of the eight binary inputs is selected by the select inputs and routed to the complementary outputs (Y and  $\overline{Y}$ ). A HIGH on  $\overline{E}$ forces the output Y LOW and output  $\overline{Y}$  HIGH. Inputs also include clamp diodes that enable the use of current limiting resistors to interface inputs to voltages in excess of  $V_{CC}$ .

#### **Features and benefits** 2.

- Input levels:
  - For 74HC151: CMOS level
  - For 74HCT151: TTL level
- Low-power dissipation
- Non-inverting data path
- Specified in compliance with JEDEC standard no. 7A
- ESD protection:
  - HBM JESD22-A114F exceeds 2 000 V
  - MM JESD22-A115-A exceeds 200 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


#### **Ordering information** 3.


Table 1.	Ordering information
----------	----------------------

Type number	Package				
	Temperature range	Name	Description	Version	
74HC151N	–40 °C to +125 °C	DIP16	plastic dual in-line package; 16 leads (300 mil)	SOT38-4	
74HCT151N					
74HC151D	–40 °C to +125 °C	SO16	plastic small outline package; 16 leads; body width	SOT109-1	
74HCT151D			3.9 mm		
74HC151DB	–40 °C to +125 °C	SSOP16	plastic shrink small outline package; 16 leads;	SOT338-1	
74HCT151DB			body width 5.3 mm		
74HC151PW	–40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads;	SOT403-1	
74HCT151PW			body width 4.4 mm		




## 4. Functional diagram

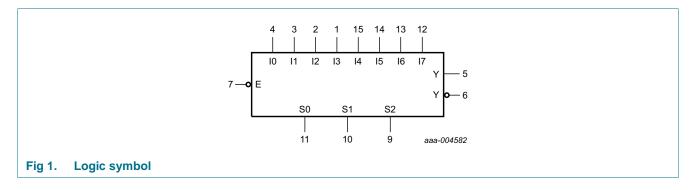

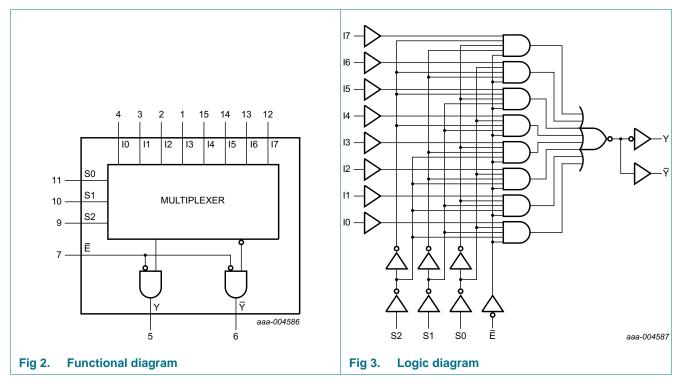

## 5. Pinning information

### 5.1 Pinning

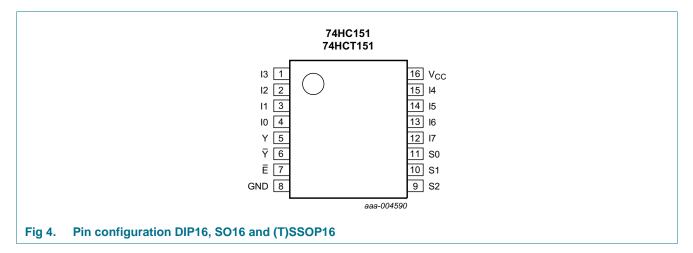

## 5.2 Pin description

Table 2.	Pin description	
Symbol	Pin	Description
10 to 17	4, 3, 2, 1, 15, 14, 13, 12	data inputs
Y	5	multiplexer output
Y	6	complementary multiplexer output
Ē	7	enable input (active LOW)
GND	8	ground (0 V)
S0, S1, S2	2 11, 10, 9	common data select inputs
V <sub>CC</sub>	16	supply voltage

## 6. Functional description

### Table 3. Function table<sup>[1]</sup>

Input												Outp	ut
E	S2	S1	S0	10	11	12	13	14	15	16	17	Y	Y
Н	Х	Х	Х	Х	Х	Х	Х	х	Х	Х	Х	Н	L
L	L	L	L	L	Х	Х	Х	Х	Х	Х	Х	Н	L
L	L	L	L	Н	Х	Х	Х	Х	Х	Х	Х	L	Н
L	L	L	Н	Х	L	Х	Х	Х	Х	Х	Х	Н	L
L	L	L	Н	Х	Н	Х	Х	Х	Х	Х	Х	L	Н
L	L	Н	L	Х	Х	L	Х	Х	Х	Х	Х	Н	L
L	L	Н	L	Х	Х	Н	Х	Х	Х	Х	Х	L	Н
L	L	Н	Н	Х	Х	Х	L	Х	Х	Х	Х	Н	L
L	L	Н	Н	Х	Х	Х	Н	Х	Х	Х	Х	L	Н
L	Н	L	L	Х	Х	Х	Х	L	Х	Х	Х	Н	L
L	Н	L	L	Х	Х	Х	Х	Н	Х	Х	Х	L	Н
L	Н	L	Н	Х	Х	Х	Х	Х	L	Х	Х	Н	L
L	Н	L	Н	Х	Х	Х	Х	Х	Н	Х	Х	L	Н
L	Н	Н	L	Х	Х	Х	Х	Х	Х	L	Х	Н	L
L	Н	Н	L	Х	Х	Х	Х	Х	Х	Н	Х	L	Н
L	Н	Н	Н	Х	Х	Х	Х	Х	Х	Х	L	Н	L
L	Н	Н	Н	Х	Х	Х	Х	Х	Х	Х	Н	L	Н

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care.

## 7. Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

				10	,
Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{I}$ < -0.5 V or $V_{I}$ > $V_{CC}$ + 0.5 V	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_{\rm O}$ < –0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	-	±20	mA
lo	output current	$V_{O} = -0.5 \text{ V} \text{ to } (V_{CC} + 0.5 \text{ V})$	-	±25	mA
I <sub>CC</sub>	supply current		-	+50	mA
I <sub>GND</sub>	ground current		-	-50	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C

#### Table 4. Limiting values ...continued

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40 \text{ °C to } +125 \text{ °C}$			
	DIP16 package		<u>[1]</u> _	750	mW
	SO16 package		[2] _	500	mW
	(T)SSOP16 package		<u>[3]</u> _	500	mW

[1] For DIP16 package:  $P_{tot}$  derates linearly with 12 mW/K above 70  $^\circ C.$ 

[2] For SO16 package:  $P_{tot}$  derates linearly with 8 mW/K above 70  $^\circ C.$ 

[3] For SSOP16 and TSSOP16 packages: P<sub>tot</sub> derates linearly with 5.5 mW/K above 60  $^\circ$ C.

### 8. Recommended operating conditions

### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter Conditions		74HC <sup>-</sup>	151		74HC	Unit		
			Min	Тур	Max	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C
$\Delta t / \Delta V$	input transition rise and fall rate	$V_{CC} = 2.0 V$	-	-	625	-	-	-	ns/V
		$V_{CC} = 4.5 V$	-	1.67	139	-	1.67	139	ns/V
		$V_{CC} = 6.0 V$	-	-	83	-	-	-	ns/V

## 9. Static characteristics

### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Ta	<sub>mb</sub> = 25	°C	T <sub>amb</sub> = - +85	40 °C to 5 °C	T <sub>amb</sub> = −40 °C to +125 °C		Unit	
			Min	Тур	Max	Min	Max	Min	Max		
74HC15	1			•							
V <sub>IH</sub>	HIGH-level	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V	
	input voltage	$V_{CC} = 4.5 V$	3.15	2.4	-	3.15	-	3.15	-	V	
		$V_{CC} = 6.0 V$	4.2	3.2	-	4.2	-	4.2	-	V	
V <sub>IL</sub>	LOW-level	$V_{CC} = 2.0 V$	-	0.8	0.5	-	0.5	-	0.5	V	
	input voltage	$V_{CC} = 4.5 V$	-	2.1	1.35	-	1.35	-	1.35	V	
		$V_{CC} = 6.0 V$	-	2.8	1.8	-	1.8	-	1.8	V	
011	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$									
	output voltage	$I_{O}$ = –20 $\mu A; V_{CC}$ = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V	
		$I_{O}$ = –20 $\mu A; V_{CC}$ = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V	
		$I_{O}$ = –20 $\mu A; V_{CC}$ = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V	
		$I_{O}$ = -4.0 mA; $V_{CC}$ = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V	
		$I_{O}$ = -5.2 mA; $V_{CC}$ = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V	
V <sub>OL</sub>	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}$									
	output voltage	$I_{O}$ = 20 $\mu$ A; $V_{CC}$ = 2.0 V	-	0	0.1	-	0.1	-	0.1	V	
		$I_O = 20 \ \mu\text{A}; \ V_{CC} = 4.5 \ V$	-	0	0.1	-	0.1	-	0.1	V	
		$I_{O} = 20 \ \mu A; V_{CC} = 6.0 \ V$	-	0	0.1	-	0.1	-	0.1	V	
		$I_{O}$ = 4.0 mA; $V_{CC}$ = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V	
		$I_{O} = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V	
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1.0	-	±1.0	μA	
lcc	supply current		-	-	8.0	-	80	-	160	μA	
CI	input capacitance		-	3.5	-					pF	

8-input multiplexer

### Table 6. Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Ta	<sub>mb</sub> = 25	°C		T <sub>amb</sub> = −40 °C to +85 °C		T <sub>amb</sub> = −40 °C to +125 °C	
			Min	Тур	Max	Min	Max	Min	Max	
74HCT1	51					1	1			1
V <sub>IH</sub>	HIGH-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		$I_0 = -4 \text{ mA}$	3.98	4.32	-	3.84	-	3.7	-	V
0L	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = 20 μA	-	0	0.1	-	0.1	-	0.1	V
		l <sub>O</sub> = 4.0 mA	-	0.15	0.26	-	0.33	-	0.4	V
I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 V$	-	-	±0.1	-	±1.0	-	±1.0	μΑ
I <sub>CC</sub>	supply current		-	-	8.0	-	80	-	160	μΑ
∆l <sub>CC</sub>	additional supply current	$\label{eq:VI} \begin{array}{l} V_{I} = V_{CC} - 2.1 \text{ V};\\ \text{other inputs at } V_{CC} \text{ or GND};\\ V_{CC} = 4.5 \text{ V to 5.5 V};\\ I_{O} = 0 \text{ A} \end{array}$								
		per input pin; In inputs	-	45	162	-	203	-	221	μΑ
		per input pin; $\overline{E}$ input	-	30	108	-	135	-	147	μA
		per input pin; Sn input	-	150	540	-	675	-	735	μA
Cı	input capacitance		-	3.5	-					pF

## **10.** Dynamic characteristics

#### Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit see Figure 7.

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Max	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	255	ns
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	51	ns
$\begin{array}{c c c c c c c c c } In \ to \ \overline{Y}; see \ Figure 5 & [1] \\ \hline V_{CC} = 2.0 \ V & - & 58 & 185 & - & 230 & - \\ \hline V_{CC} = 4.5 \ V & - & 21 & 37 & - & 46 & - \\ \hline V_{CC} = 5 \ V; \ C_L = 15 \ pF & - & 17 & - & - & - & - \\ \hline V_{CC} = 6.0 \ V & - & 17 & 31 & - & 39 & - \\ \hline Sn \ to \ Y; see \ Figure 6 & [1] & & & & \\ \hline V_{CC} = 2.0 \ V & - & 61 & 185 & - & 230 & - \\ \hline V_{CC} = 4.5 \ V & - & 22 & 37 & - & 46 & - \\ \hline V_{CC} = 5 \ V; \ C_L = 15 \ pF & - & 19 & - & - & - \\ \hline V_{CC} = 6.0 \ V & - & 18 & 31 & - & 39 & - \\ \hline \end{array}$	-	ns
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	43	ns
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	280	ns
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	56	ns
Sn to Y; see Figure 6[1] $V_{CC} = 2.0 V$ -61185-230- $V_{CC} = 4.5 V$ -2237-46- $V_{CC} = 5 V; C_L = 15 pF$ -19 $V_{CC} = 6.0 V$ -1831-39-	-	ns
$V_{CC} = 2.0 \text{ V}$ -61185-230- $V_{CC} = 4.5 \text{ V}$ -2237-46- $V_{CC} = 5 \text{ V};  \text{C}_{\text{L}} = 15 \text{ pF}$ -19 $V_{CC} = 6.0 \text{ V}$ -1831-39-	48	ns
$V_{CC} = 4.5 V$ -2237-46- $V_{CC} = 5 V; C_L = 15 pF$ -19 $V_{CC} = 6.0 V$ -1831-39-		
$V_{CC} = 5 V; C_L = 15 pF - 19 V_{CC} = 6.0 V - 18 31 - 39 $	280	ns
$V_{CC} = 6.0 V$ - 18 31 - 39 -	56	ns
	-	ns
Sn to $\overline{Y}$ ; see Figure 6 [1]	48	ns
V <sub>CC</sub> = 2.0 V - 61 205 - 255 -	310	ns
V <sub>CC</sub> = 4.5 V - 22 41 - 51 -	62	ns
$V_{CC} = 5 V; C_L = 15 pF$ - 19	-	ns
V <sub>CC</sub> = 6.0 V - 18 35 - 43 -	53	ns
Ē to Y; see Figure 6		
V <sub>CC</sub> = 2.0 V - 41 125 - 155 -	190	ns
V <sub>CC</sub> = 4.5 V - 15 25 - 31 -	38	ns
$V_{CC} = 5 V; C_L = 15 pF$ - 12	-	ns
V <sub>CC</sub> = 6.0 V - 12 21 - 26 -	32	ns
$\overline{E}$ to $\overline{Y}$ ; see Figure 6		
V <sub>CC</sub> = 2.0 V - 47 145 - 180 -	220	ns
V <sub>CC</sub> = 4.5 V - 17 29 - 36 -	44	ns
$V_{CC} = 5 V; C_L = 15 pF$ - 14	-	ns
V <sub>CC</sub> = 6.0 V - 14 25 - 31 -	38	ns
t transition Y, $\overline{Y}$ ; see Figure 5 [2]		
time $V_{CC} = 2.0 V$ - 19 75 - 95 -	110	ns
V <sub>CC</sub> = 4.5 V - 7 15 - 19 -	22	ns
V <sub>CC</sub> = 6.0 V - 6 13 - 16 -		

8-input multiplexer

Symbol	Parameter	Conditions		Tan	<sub>nb</sub> = 25	°C	T <sub>amb</sub> = −40 °C to +85 °C		T <sub>amb</sub> = −40 °C to +125 °C		Unit
				Min	Тур	Max	Min	Max	Min	Max	_
C <sub>PD</sub>	power dissipation capacitance	$C_L$ = 50 pF; f = 1 MHz; V <sub>I</sub> = GND to V <sub>CC</sub>	<u>[3]</u>	-	40	-	-	-	-	-	pF
For type	74HCT151										
t <sub>pd</sub>	propagation	In to Y; see Figure 5	<u>[1]</u>								
	delay	$V_{CC} = 4.5 V$		-	22	38	-	48	-	57	ns
		$V_{CC} = 5 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	19	-	-	-	-	-	ns
		In to $\overline{Y}$ ; see Figure 5	<u>[1]</u>								
		$V_{CC} = 4.5 V$		-	22	38	-	48	-	57	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	19	-	-	-	-	-	ns
		Sn to Y; see Figure 6	[1]								
		$V_{CC} = 4.5 V$		-	23	41	-	51	-	62	ns
		$V_{CC} = 5 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	20	-	-	-	-	-	ns
		Sn to $\overline{Y}$ ; see Figure 6	[1]								
		$V_{CC} = 4.5 V$		-	25	43	-	54	-	65	ns
		$V_{CC} = 5 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	20	-	-	-	-	-	ns
		E to Y; see Figure 6	<u>[1]</u>								
		$V_{CC} = 4.5 V$		-	16	29	-	36	-	44	ns
		$V_{CC} = 5 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	13	-	-	-	-	-	ns
		$\overline{E}$ to $\overline{Y}$ ; see Figure 6	[1]								
		$V_{CC} = 4.5 V$		-	21	36	-	45	-	54	ns
		$V_{CC} = 5 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	18	-	-	-	-	-	ns
t <sub>t</sub>	transition	Y, Y; see Figure 5	[2]								
	time	$V_{CC} = 4.5 V$		-	7	15	-	19	-	22	ns
C <sub>PD</sub>	power dissipation capacitance	$C_L$ = 50 pF; f = 1 MHz; V <sub>I</sub> = GND to V <sub>CC</sub>	<u>[3]</u>	-	40	-	-	-	-	-	pF

#### Table 7. Dynamic characteristics ... continued

[1]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

[2]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .

[3]  $C_{PD}$  is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).  $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \sum (C_{L} \times V_{CC}^{2} \times f_{o}) \text{ where:}$  $f_i$  = input frequency in MHz;  $f_o = output frequency in MHz;$ 

 $C_L$  = output load capacitance in pF;


V<sub>CC</sub> = supply voltage in V;


N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

8-input multiplexer

## 11. Waveforms

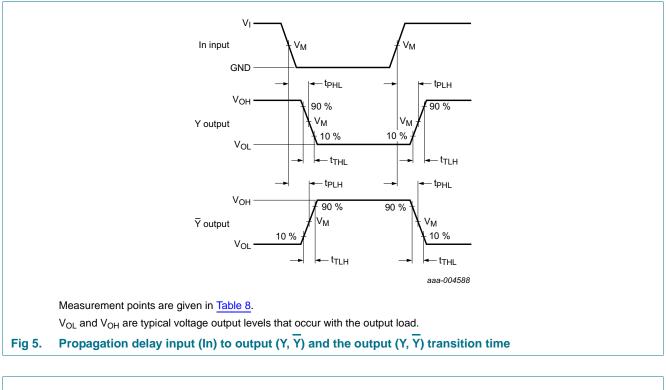

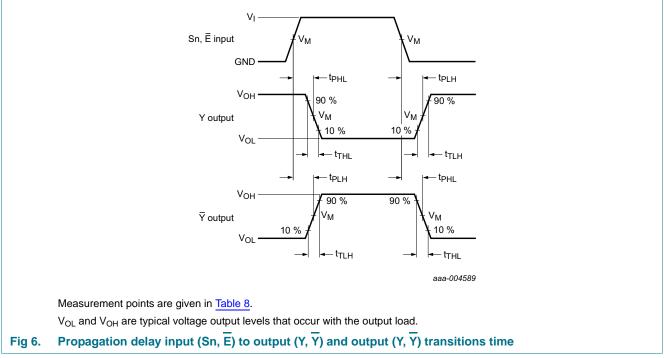

### **NXP Semiconductors**

## 74HC151; 74HCT151

### 8-input multiplexer

Table 8.   Measurement points								
Туре	Input	Output						
	V <sub>M</sub>	V <sub>M</sub>						
74HC151	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>						
74HCT151	1.3 V	1.3 V						


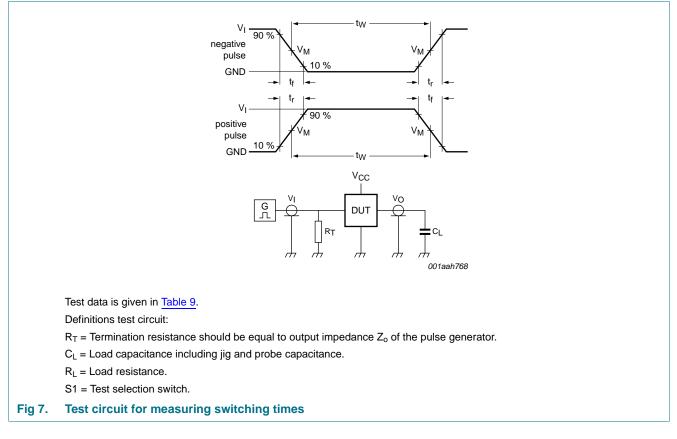


Table 9. Test data					
Туре	Input		Load	Test	
	VI	t <sub>r</sub> , t <sub>f</sub>	CL		
74HC151	V <sub>CC</sub>	6.0 ns	15 pF, 50 pF	t <sub>PLH</sub> , t <sub>PHL</sub>	
74HCT151	3.0 V	6.0 ns	15 pF, 50 pF	t <sub>PLH</sub> , t <sub>PHL</sub>	

## 12. Package outline

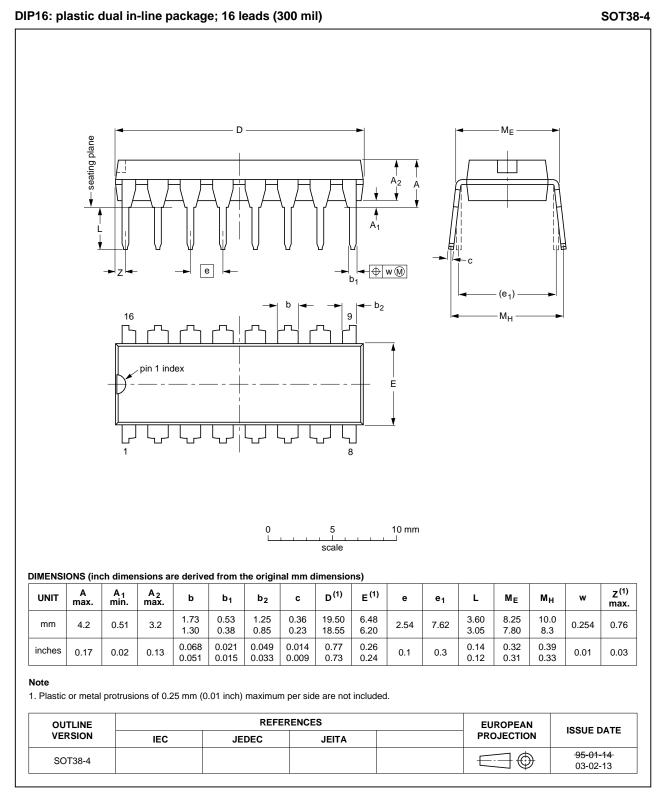

### Fig 8. Package outline SOT38-4 (DIP16)

All information provided in this document is subject to legal disclaimers.

74HC\_HCT151

#### © NXP B.V. 2013. All rights reserved.

8-input multiplexer

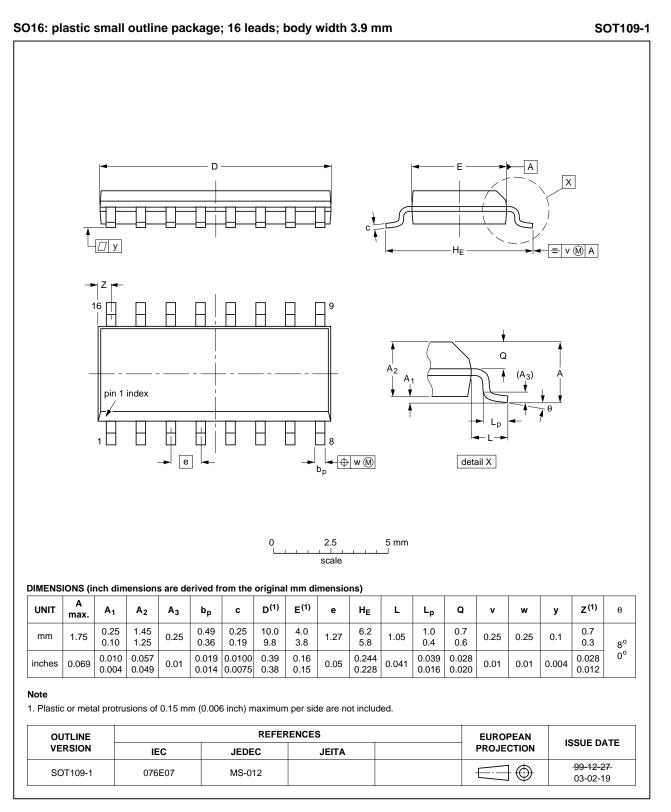


Fig 9. Package outline SOT109-1 (SO16)

8-input multiplexer

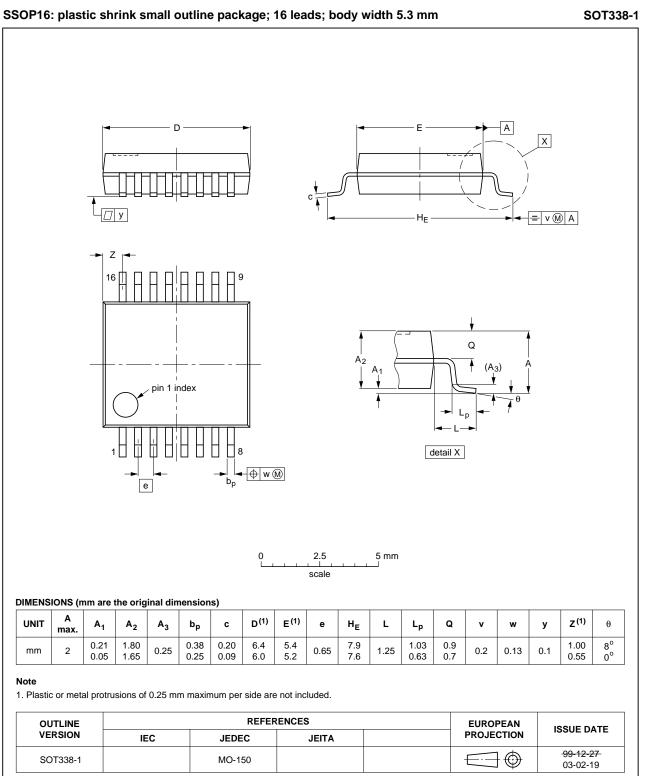


Fig 10. Package outline SOT338-1 (SSOP16)

8-input multiplexer

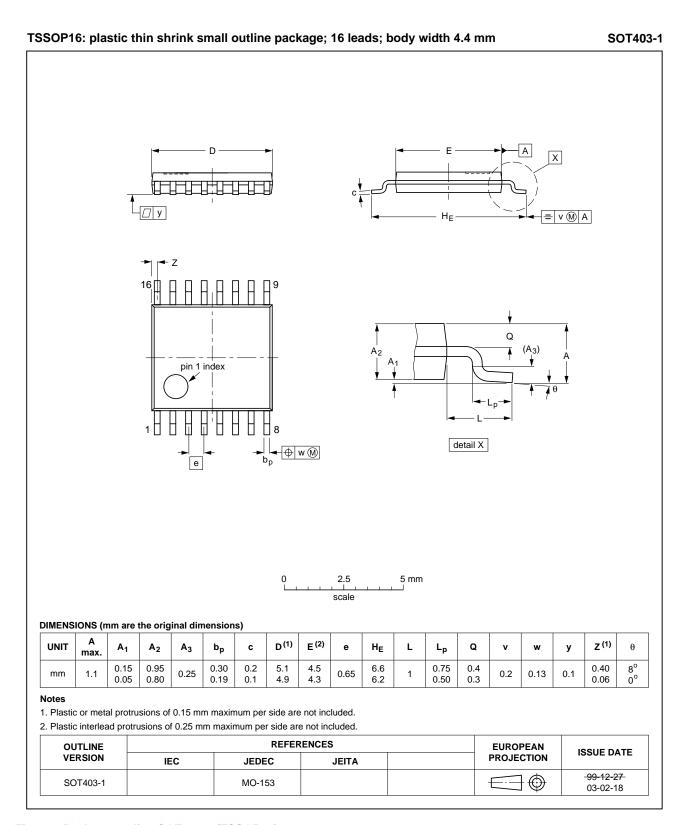


Fig 11. Package outline SOT403-1 (TSSOP16)

All information provided in this document is subject to legal disclaimers.

## **13. Abbreviations**

AcronymDescriptionCMOSComplementary Metal Oxide SemiconductorDUTDevice Under TestESDElectroStatic DischargeHBMHuman Body ModelMMMachine ModelTTLTransistor-Transistor LogicMUMilitary	Table 10. Abbreviations		
DUTDevice Under TestESDElectroStatic DischargeHBMHuman Body ModelMMMachine ModelTTLTransistor-Transistor Logic	Acronym	Description	
ESD       ElectroStatic Discharge         HBM       Human Body Model         MM       Machine Model         TTL       Transistor-Transistor Logic	CMOS	Complementary Metal Oxide Semiconductor	
HBM     Human Body Model       MM     Machine Model       TTL     Transistor-Transistor Logic	DUT	Device Under Test	
MM     Machine Model       TTL     Transistor-Transistor Logic	ESD	ElectroStatic Discharge	
TTL Transistor-Transistor Logic	HBM	Human Body Model	
	MM	Machine Model	
MIL Militany	TTL	Transistor-Transistor Logic	
MIL MINUTY	MIL	Military	

## 14. Revision history

### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT151 v.4	20130211	Product data sheet	-	74HC_HCT151 v.3
Modifications:	<ul> <li>New descr</li> </ul>	iptive title (errata).		
74HC_HCT151 v.3	20120919	Product data sheet	-	74HC_HCT151_CNV v.2
74HC_HCT151_CNV v.2	19970827	Product specification	-	

## **15. Legal information**

### 15.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nxp.com">http://www.nxp.com</a>.

### 15.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

74HC HCT151

### 8-input multiplexer

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 16. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

### 8-input multiplexer

### **17. Contents**

1	General description 1
2	Features and benefits 1
3	Ordering information 1
4	Functional diagram 2
5	Pinning information 3
5.1	Pinning 3
5.2	Pin description 3
6	Functional description 4
7	Limiting values 4
8	Recommended operating conditions 5
9	Static characteristics 6
10	Dynamic characteristics 8
11	Waveforms 10
12	Package outline 12
13	Abbreviations 16
14	Revision history 16
15	Legal information 17
15.1	Data sheet status 17
15.2	Definitions 17
15.3	Disclaimers
15.4	Trademarks 18
16	Contact information 18
17	Contents 19

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2013.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 11 February 2013 Document identifier: 74HC\_HCT151 This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.