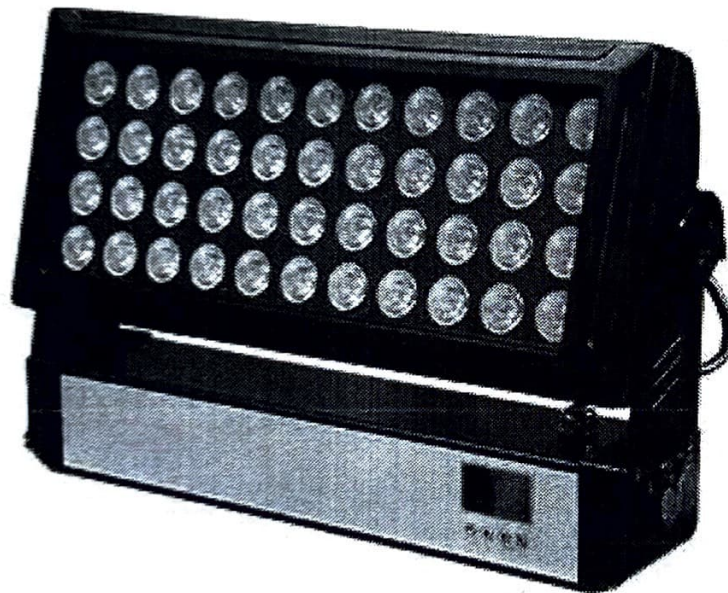# 44LED Wash Light--Waterproof

■ OL-R P5 44X10W RGBW

ZONE LIGHT

Please Read Over This Manual before Operating the Light Fixture

Thank you so much to choose this product; it is adopting the most advanced lamps, which is called LED lamps. It conquers a lot of disadvantages such as power wasting, short using life, high temperature, etc. It has advantages of power saving, long life (it can reach 60,000.00 hours in general circs), high brightness, fresh colors...It is the best stage illuminating and various effect decorative prodzucts.
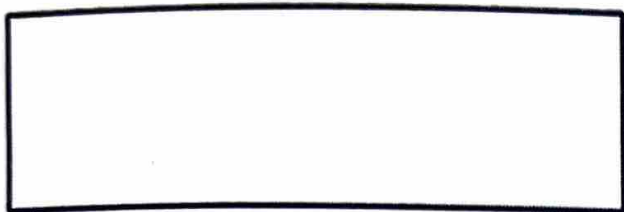
DMX512Control： 8 Channel Model

CH	Function	Instruction
CH1	Dimmer	Total dimmer : from dark to bright
CH2	Strobe	Total strobe: from slow to fast
CH3	Function Selection	0~49:none,50~250, Color Macros 251-255: Sound mode.
CH4	Speed	Function of speed, from slow to fast
CH5	R dimmer	Red dimmer : from dark to bright
CH6	G dimmer	Green dimmer : from dark to bright
CH7	B dimmer	Blue dimmer : from dark to bright
CH8	W dimmer	White dimmer: from dark to bright

DMX512Control： 4 Channel Model

CH	Function	Instruction
CH1	R dimmer	Red dimmer : from dark to bright
CH2	G dimmer	Green dimmer : from dark to bright
CH3	B dimmer	Blue dimmer : from dark to bright
CH4	W dimmer	White dimmer: from dark to bright

KEYS INSTRUCTION

MENU   UP   DOWN   ENTER

WINDOWS SHOW FUNCTION FORM

NO	DISPLAY	Instruction
1	ADDR-4CH 001	4CH mode, address set, (001-512)
2	ADDR-8CH 001	8CH mode, address set, (001-512)
3	RED 255	Red color dimming, (000-255)
4	GREEN 255	Green color dimming, (000-255)
5	BLUE 255	Blue color dimming, (000-255)
6	WHITE 255	White color dimming, (000-255)
7	STROBE 99	Strobe from slow to fast,(01-99)
8	WHOOL	Color select 01-08
9	JUMP 99	Colors Jump Change,(01-99)
10	GRADIENT 99	Colors Gradate,(01-99)
11	PUSLE 99	Colors pusle,(01-99)
12	SOUND 09	Sound mode

Technical Reference:

Voltage: AC110-220V 50-60HZ
Power: 450W
Light source: 44 PCS*10W RGBW 4IN1 LED
DMX Channels: 4/8 channel combination optional
SIZE: 480*380*130 MM
GW: 14.5 KG/PCS